

# Freeze-Resistant Dual Barrier-Free Pedestal Fountain

Model: DF-DualFR

## Fountain

Barrier-Free Pedestal Fountain is a weatherproof exposed stone aggregate fountain for year-round beauty with minimum maintenance. Accessible to wheelchair users with all edges and corners beveled for safety and chip resistance. This fountain meets state and federal handicapped requirements when installed in accordance with the clearances defined by the Americans with Disabilities Act. All components of fountain are lead free.

## Fountain Top

Stainless steel, form fit, permanently affixed receptor.

## Freeze-Resistant Valve System

Freeze-resistant valve designed for ground installation 18" below the frost line. 60" of access tubing provided with the freeze-resistant valve system. The length of the tubing can be reduced in the field for lesser frost depths.

## Projector

Vandal-proof, chrome-plated, two stream, mound building projector with integral hood guard and anti-squirt feature (non removable).

Optional side faucet available as field kit.

## Valve

Self-closing pushbutton valve with automatic stream regulator.

## Access Panel

Manufactured of heavy-gauge steel with vandal-resistant button head bolts. Baked on enamel protective coating is resistant to wear, moisture and sunlight. Provides access for easy hookup of all plumbing connections.

## Water Inlet

3/8" female NPT fitting

## Drain Outlet

Drain requirements are detailed in owner's manual.


## Access Panel

Manufactured of heavy-gauge steel with vandal-resistant screws. Provides access for easy hook-up of all plumbing connections.

## Operating Pressures

Supply water - 105 psi maximum

**Trap and service stop not included.**

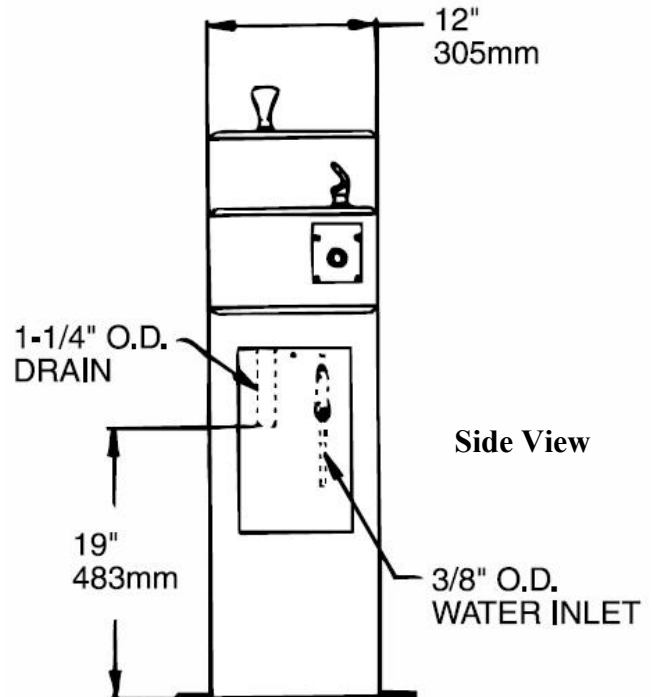

318 East 8<sup>th</sup> Street, La Crosse, KS 67548 785-222-2515 / 888-846-2693 [www.markstaar.com](http://www.markstaar.com)

**Mounting Instructions and Plumbing Connections**


Site and drainage excavation is required for fountain installation. Refer to owner’s manual for site preparation details. Provide solid, well-drained surface to mount pedestal fountain (concrete pad recommended).

(4) 1/2" anchor bolts (not included) should be attached firmly to mounting surface in order to secure fountain.

Refer to rough-in diagram and be sure to allow an opening for the freeze-resistant valve in the ground as shown in the installation instructions that accompany the fountain. Refer to local codes for any additional requirements.

NOTE: Fountain is not furnished with service valve. Assemble fountain to prepared site and mounting pad.

Position pedestal over plumbing and secure base to anchor bolts. Remove access panels and connect supply and water lines. Turn on water supply and check for leaks. Refer to owner’s manual for detailed instructions.

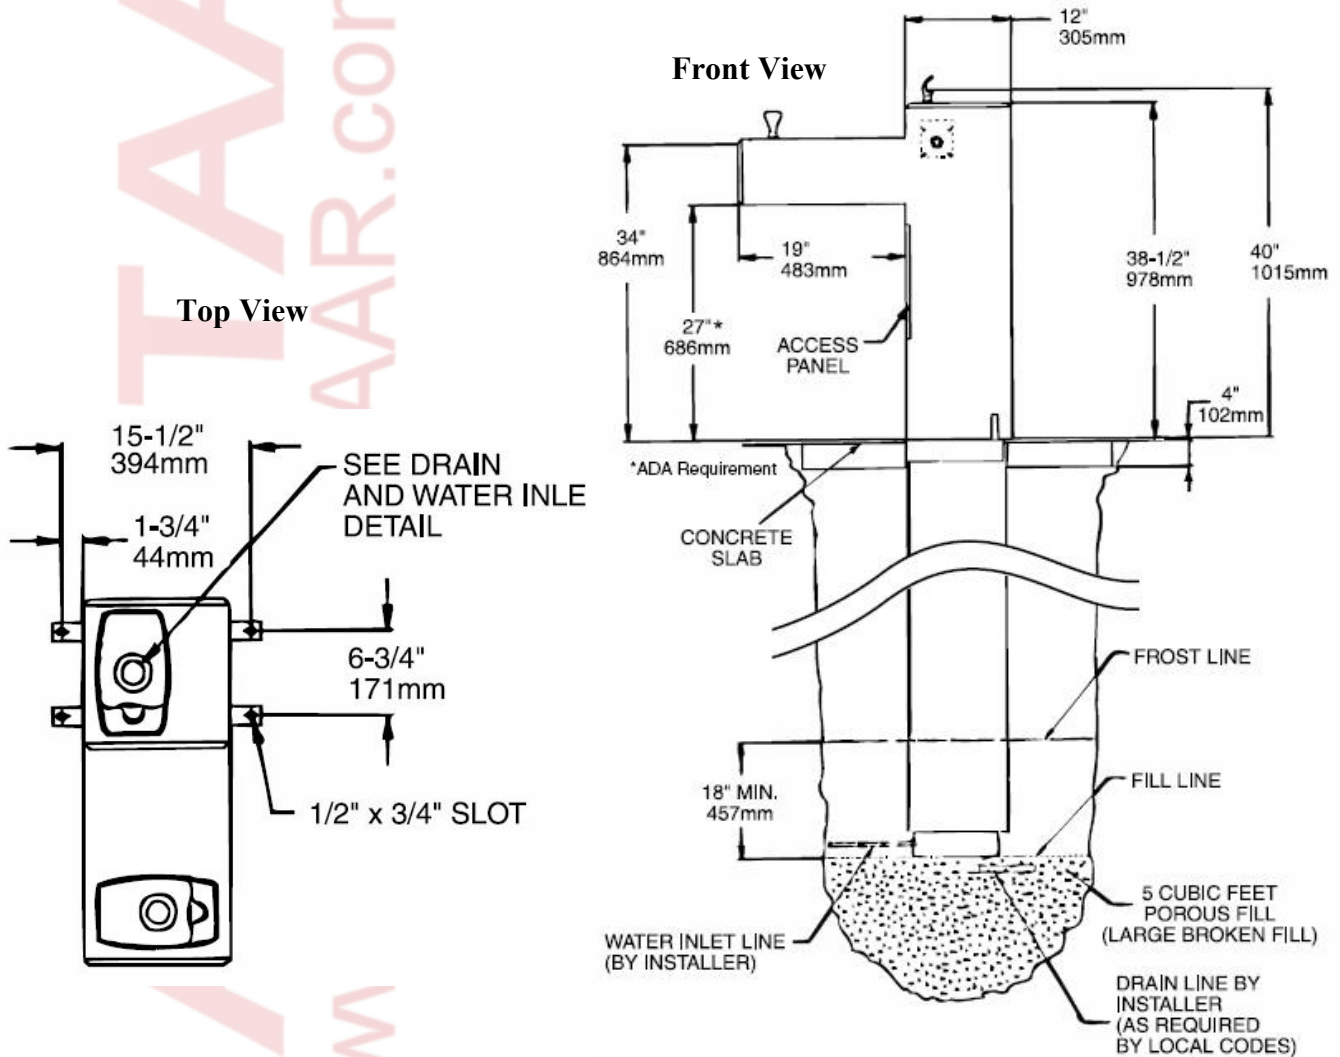

MARKSTAAR's Freeze-Resistant Dual Barrier-Free Drinking Fountain conforms to The Americans with Disabilities Act and American National Standards Institute Specifications.

