

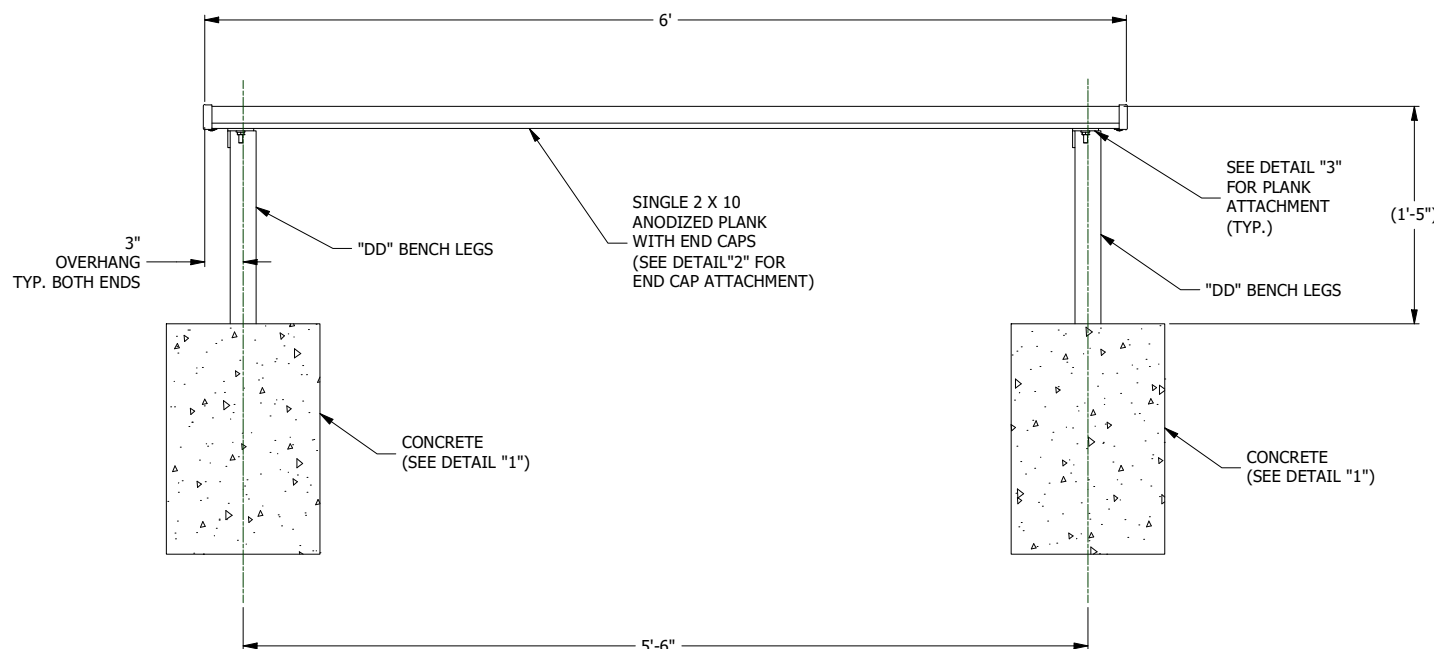


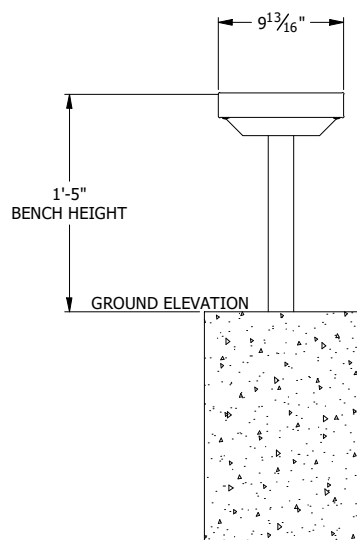

ALUMINUM SURFACE TO BE EMBEDDED IN CONCRETE
ORDINARILY NEED NOT BE PAINTED, UNLESS CORROSIVE
COMPONENTS ARE ADDED TO THE CONCRETE, OR UNLESS
THE ASSEMBLY IS SUBJECTED TO EXTENDED PERIODS OF
EXTREMELY CORROSIVE CONDITIONS. IN SUCH CASES,
ALUMINUM SURFACES SHALL NEED A SINGLE COAT OF
SUITABLE QUALITY PAINT, SUCH AS ZINC MOLYBDATE
PRIMER, WHICH CONFORMS TO FEDERAL SPECIFICATION TT-P-645B,
OR EQUIVALENT. ALTERNATIVELY A HEAVY COAT OF ALKALI RESISTANT
BITUMINOUS PAINT MAY BE USED, OR THE SURFACE MAY BE WRAPPED
WITH A SUITABLE PLASTIC TAPE THAT IS APPLIED TO PROVIDE ADEQUATE
PROTECTION AT THE OVERLAPS.

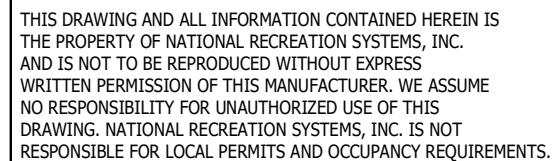

SHEET #:	BA.1
----------	------