GY Series

MODEL GYU64

BARRIER-FREE OUTDOOR PEDESTAL MOUNTED BOTTLE FILLER

STANDARD FEATURES

- *Adult ADA compliant*
- *Pushbutton and hands free sensor operated Bottle filler*
- *Battery pack 6-AA*
- *Laminar flow water supply to bottle filler*
- *Resistant to sunlight, heat, moisture and wear*
- *12 Gage, heavy duty stainless steel construction with corrosion and scratch resistant finish*
- *100 mesh inlet strainer*
- *Lead and cyst filter (Not available with FRU option)*
- *Access cover, heavy duty stainless steel, vandal resistant*

SUGGESTED SPECIFICATIONS

Barrier-free bottle filler shall be Murdock model GYU64. Construction shall be 12 gage. Pedestal base shall have four mounting holes. Access covers shall be secured with vandal-resistant stainless steel screws. Bottle filler shall be activated by a 9 volt sensor or a pushbutton as standard. Unit shall contain a 100 mesh inlet strainer, lead and cyst filter, 6-AA battery pack and laminar flow spout. Self-closing pushbutton, needing less than 5 pounds force, shall activate internally mounted valve with adjustable stream regulator. Unit is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA requirements when mounted appropriately.

Model GYU64-PF Shown

MODEL:

(Must Specify)

❑	GYU64	Satin Stainless Finish (Shown)
❑	GYU65	Green Powder-Coated
❑	GYU66	Red Powder-Coated
❑	GYU67	Blue Powder-Coated

OPTIONAL ACCESSORIES

(additional costs may be incurred)

❑	-CV	Cartridge Valve on Fountain (-PF ONLY)
❑	-FRU1	Underground freeze-resistant, 1 valve [1] (Less Filter and sensor)
❑	-FRU2	Underground freeze-resistant, 2 valves [1] (Less Filter and sensor)
❑	-IAP	In-ground anchor plate
❑	-LOGO	Customer specified logo
❑	-MO	Bottle filler operated by pushbutton only (required for freeze-resistant valve)
❑	-NP1	Non-pollutable, freeze resistant, 1 valve
❑	-NP2	Non-pollutable, freeze resistant, 2 valves
❑	-PF	Pet fountain [1]

Option Notes:
[1] See separate option sheet

Complies with the following standards: Federal Public Law 111-380 (No Lead)

Recyclable Product

Water Conserving Product

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

murdock® SINCE 1853 OUTDOOR BOTTLE FILLERS

IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRU, -NP" WILL DIFFER FROM STANDARD. REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.

GY Series

MODEL GYU64

BARRIER-FREE OUTDOOR
PEDESTAL MOUNTED
BOTTLE FILLER

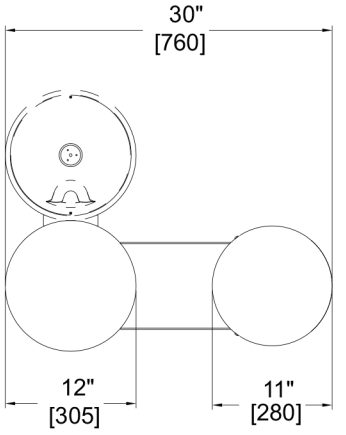

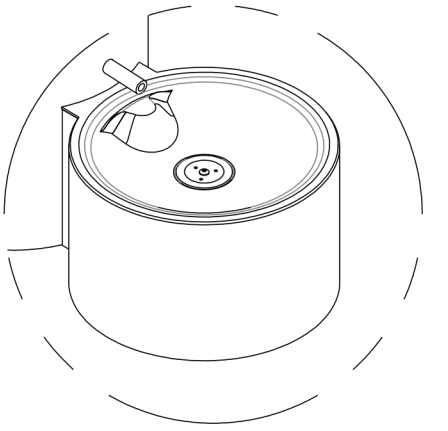

OPTIONAL -PF
PET FOUNTAIN
DETAIL

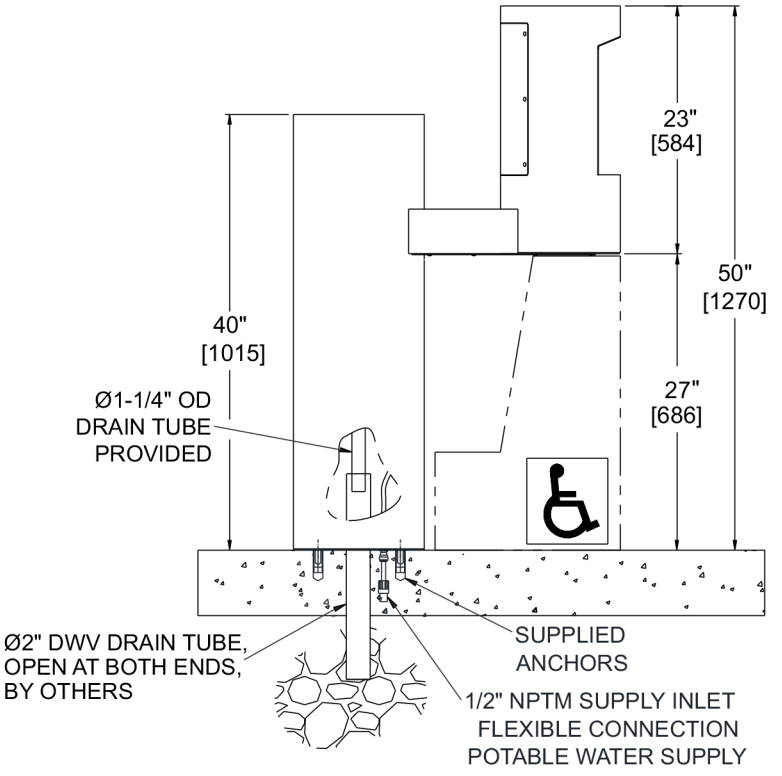

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options_____ Quantity_____

Company_____

Contact_____ Title_____

Signature
(Approval for
Manufacturing)_____ Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®. Please visit ***www.murdockmfg.com*** *for most current specifications.*