

# Shower Series

## MODEL M-PCS14

ONE STATION POOL  
AND BEACH SHOWER

### STANDARD FEATURES

---

- Pushbutton requiring less than 5 pounds for activation
- Adjustable timing, from 5 to 60 seconds
- Chrome plated brass shower head with 2.5 gpm flow control and adjustable spray pattern
- Vandal resistant fasteners
- Shut off valve for easy servicing
- Heavy duty, 14 gage, 304 stainless steel construction with corrosion and scratch resistant satin finish

### SUGGESTED SPECIFICATIONS


---

Column shower shall be Murdock model M-PCS14, single station shower. Unit is to be pre-piped and hydrostatically tested.

Valve shall have internally mounted metering valve, pushbutton operated and requiring less than 5 pounds of force to activate. Timing shall be adjusted from 5 to 60 seconds.

Shower head shall be chrome plated brass with 2.5 gpm flow restrictor and include an adjustable spray pattern from a coarse stream to a fine mist.

Unit shall be constructed of heavy duty 14 gage type 304 stainless steel polished to a satin finish with vandal resistant fasteners and shall include a 1/4" thick stainless steel bottom plate, providing secure mounting for shower.

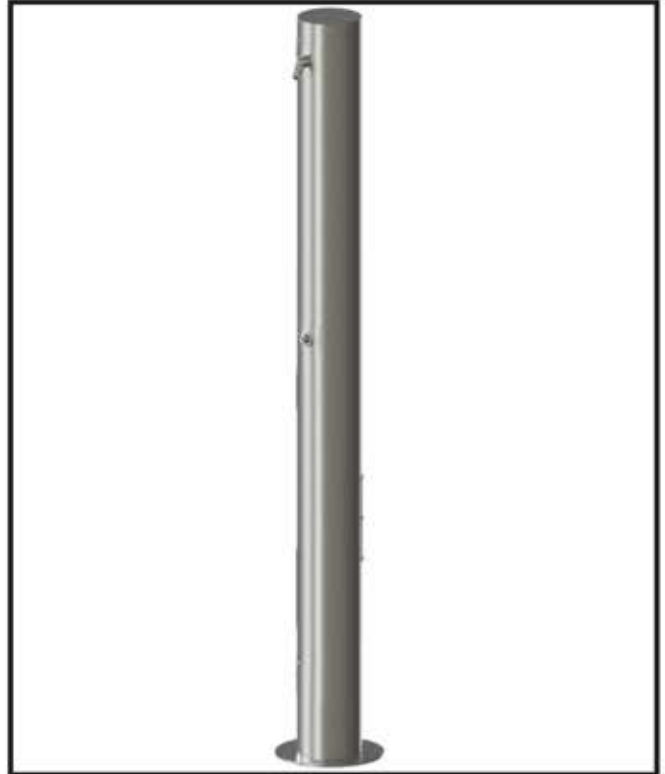

Standard Model: M-PCS14

### MODEL:

*(Must Specify)*

- 
- |                                  |                                |
|----------------------------------|--------------------------------|
| <input type="checkbox"/> M-PCS14 | Satin Stainless Finish (Shown) |
| <input type="checkbox"/> M-PCS15 | Green Powder-Coated            |
| <input type="checkbox"/> M-PCS16 | Red Powder-Coated              |
| <input type="checkbox"/> M-PCS17 | Blue Powder-Coated             |

*Custom color finishes available upon request*

### OPTIONS

*(additional costs may be incurred)*


- 
- |                                 |  |
|---------------------------------|--|
| <input type="checkbox"/> - FRU1 | Underground freeze-resistant valve for one pushbutton <sup>1</sup>                 |
| <input type="checkbox"/> - FRU2 | Underground freeze-resistant valve for two pushbuttons <sup>1</sup>                |
| <input type="checkbox"/> - FS   | Foot Shower at one station <sup>1</sup>  |
| <input type="checkbox"/> - GB   | Grab bar - Two vertical grab bars and second lower shower head at 48" <sup>1</sup> |
| <input type="checkbox"/> - IAP  | In-ground anchor plate (replaces standard anchor plate) <sup>1</sup>               |
| <input type="checkbox"/> - LOGO | Customer specified logo <sup>1</sup>   |

*Options Notes:*

<sup>1</sup> See separate option sheet.

# Shower Series

**MODEL M-PCS14**  
ONE STATION POOL  
AND BEACH SHOWER

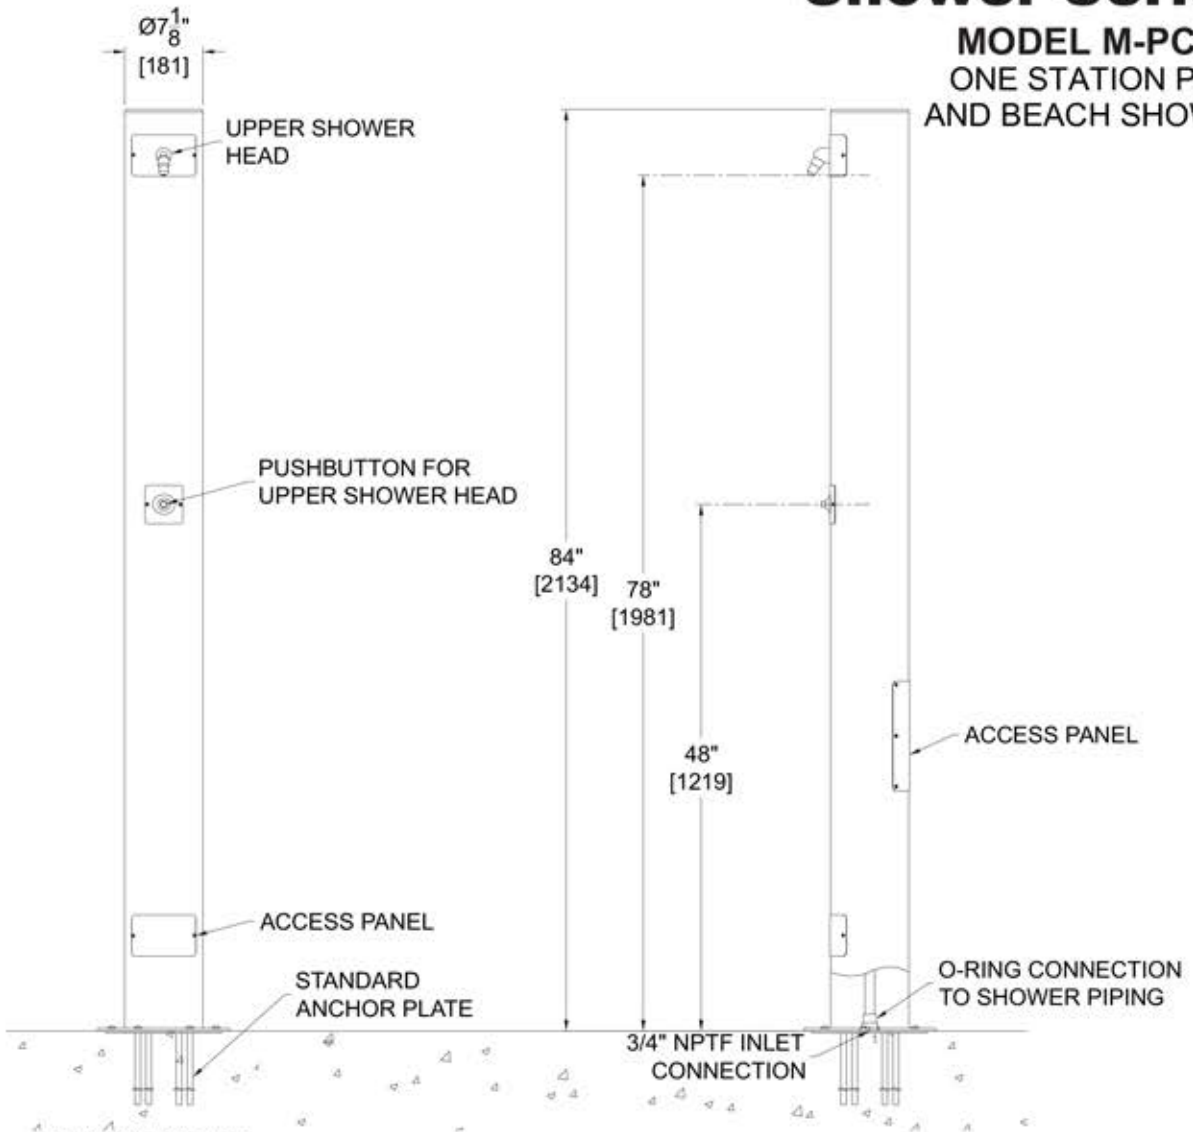

**GENERAL NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MM].

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™.
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	